


THT MEDOR®

Online analysis & control of gas odourisation

TBM

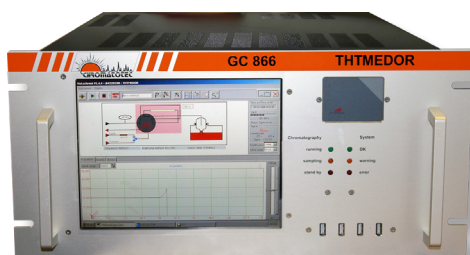

Model: M31022



Model: M31022-ATEX-Z1

THT MEDOR® applications:

Odourisation processes:

- Continuous monitoring of THT levels in natural gas
- Automatic THT injection level control
- User definable alarm thresholds
- Multiple stream analysis (Upstream / downstream)

Deodorisation processes:

- ppb level analysis (Detection limit: 5 ppb THT)
- Automatic alarm generation
- Catalyser protection

Standard:

ASTM D7493-14, ISO 19739:2004, DIN 51855/7

Certifications:

GOST, ATEX, IECEx, CSA, CSA international

ASTM D7493-14: Standard Test Method for Online Measurement of Sulfur Compounds in Natural Gas and Gaseous Fuels by Gas Chromatograph and Electrochemical Detection



Chromatotec® is specialised in VOC, Sulfur and permanent gases analysis at trace and ultra trace levels (ppm, ppb, ppt).
Please visit our website for more details.

Updated: February 2021

THT

Description:

- THT MEDOR® is an autoGC-ED (MEDOR® Electrochemical wet cell Detector) for the analysis and monitoring of THT and TBM in natural gas and gaseous fuels.

Principle:

- Automatic sampling using a loop
- Automatic loop injection on packed column
- Isothermal gas chromatograph
- Detection of THT and TBM eluting from the column performed by MEDOR® Detector: Electrochemical wet cell Detector which is SSD Sulfur Specific Detector.
- Signal provided by reaction between the wet cell electrolyte and the sulfur compounds

KeyPoints:

- Fully compliant with ASTM D 7493-14 : Standard Test Method for Online Measurement of Sulfur Compounds in Natural Gas and Gaseous Fuels by Gas Chromatograph and Electrochemical Detection.
- Automatic calibration/validation of the data, with embeded permeation tube
- Continuous monitoring with automatic online sampling
- Analytical performances:
 - Specific, linear and very sensitive to sulfur compounds
 - Results validation by automatic standard injection
 - Long term stability using detector installed in reservoir
- Extremely low maintenance:
 - Very long life time detector with electrolyte, up to 10 years
 - Low gas consumption, can be reduced in option
 - More than 10 years data storage : full chromatogram
 - No cylinders required thanks to internal calibration tube and gas generators
- Automatic control with process device
- Intelligents system with tunable and interactive alarm levels
- Powerful VISTACHROM Chromatotec® software: Remote monitoring & injection control
 - Full traceability with on board archiving of results and chromatograms
 - QC Set up and control of threshold alarms
 - Data export by MODBUS / 4-20 mA / 0-10 V
 - Time stamp results

Options:

- Multiple stream selector (up to 32 streams with one analyser)
- Explosion proof version Exp or Exd for ATEX, IECEx zone 1 and 2 group IIC T4 and also for CSA C1D2 group B , C & D T4
- Calculation modules (Average / Statistics / Odor index and more)
- Automatic data transfert through: Module for 4 outputs 4-20 mA (with 0 mA for instrument default) / 0 - 10 V / MODBUS RTU or TCPI IP or MGS1
- Nitrogen or air generator for safe and hasardous area
- 24 V DC power supply
- Electric selection valve to reduce air consumption
- Liquid injection valve from LPG up to condensates
- High concentration injection valve up to 5%
- Wall mounted box XXX934
- Liquid injection valve for LPG analysis
- Touch screen on the front panel for Exp version (only ATEX)
- External cylinder inlet for automatic calibration from external cylinder
- MFC for multipoint calibration from internal CALIB and/or from cylinder
- Zero method

Product technical specifications:

Compounds Analysed:

- THT – TetraHydroThiophene and TBM Ter Buthyl Mercaptan

Detection Limit:

- ppm Model – 1 mg/m³
- ppb Model – 0.3 mg/m³

Detection Range:

- ppm model - 1 to 50 mg/m³
- ppb model - 0.3 to 3.0mg/ m³
(Ranges adjustable depending on Application)

Relative Standard Deviation:

- RSD < 2 % on concentration over 48H
- RSD < 0.6% on retention time over 48H

Cycle Time:

- THT and TBM 180s (for one stream)
- THT and TBM 240s to 300s (for multi stream)

Supervisor:

- Embeded computer Windows® based with LCD display
- 128 GB of Hardware storage on SSD memory

Linearity:

- > 0.995 for all compounds

Communication:

- MODBUS RTU included in standard
- Ethernet, remote control

Gas supply:

- Carrier Gas: N₂ (3 bars): 10 ml/min
- Internal calibration: 50 ml/min (if selected)
- Sample inlet 1 bar (160 ml/min)
- Pneumatic valve 90 ml/commutation

Power supply:

- Main: 230V / 60Hz or 115V / 50Hz
- In case of power loss, the instrumnet will restart automatically

Electrical consumption:

- Mean: 150 VA

Dimensions and weight:

- | | |
|---|---|
| <ul style="list-style-type: none"> Rack: 19" - (5U) Height: 222mm Width: 482mm Depth: 600mm Net weight: 22Kg | <p>Exp version:</p> <ul style="list-style-type: none"> Height: 800mm Width: 600mm Depth: 320mm Net weight: 40Kg |
|---|---|

To order:

THT MEDOR®
 inbuilt computer - 5U
 THT MEDOR Exp ATEX Z2
 THT MEDOR Exp ATEX/IECEX
 THT MEDOR Exd ATEX Z1
 THT MEDOR Exd IECEx Z1

Model:

M31022
 M31022-ATEX-Z2
 M31022-ATEX-Z1
 M31022-ATEX-Z1-Exd
 M31022-IECEX-Z1-Exd

Chromatotec® is continuously improving its products, therefore these specifications are subject to change without notice

To contact us: sales@chromatotec.com

NORTH AMERICA
Houston - USA

EUROPE
Bordeaux- FRANCE

ASIA
Beijing - CHINA